


ZT-2800™

ESTATE-GRADE TRANSAXLE

- ⚙️ Our most rugged residential-grade transaxle
- ⚙️ External oil filter for ease of maintenance and longer life
- ⚙️ Available with optional shock valves and charge pump for greater performance
- ⚙️ Tough 1 inch axle for increased load support

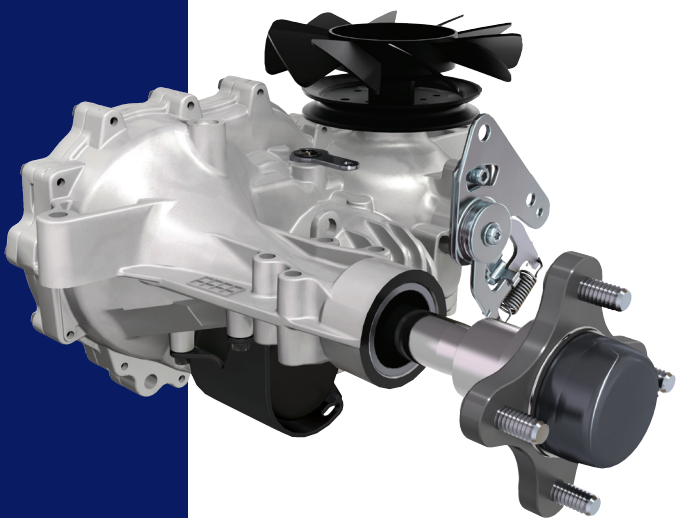

 **HYDRO-GEAR®**

DESIGNED & ASSEMBLED IN THE USA

SUPERIOR PERFORMANCE

SPECIFICATIONS

Pump Displacement	0.61 in ³ /rev [10 cc/rev]
Motor Displacement	0.97 in ³ /rev [16 cc/rev]
Input Speeds	
Max Hi-idle (No Load)	3000 rpm
Min (Loaded)	1800 rpm
Output Torque	up to 300 lb-ft [up to 406 Nm]
Speed	up to 8 mph [up to 12 kph]
Gross Vehicle Weight	up to 1000 lbs [up to 453 kg]
Axle Shaft Diameter	1.0 in [25.4 mm]
Axle Shaft Options	Tapered 4 or 5 bolt Flange
Weight of Unit	32 lbs [14.5 kg]

Specifications subject to change without notice



ZT2800Card-09/2016-V1

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**

