


SST™

BUILT FOR THE WALK BEHIND MARKET

- ⚙️ Designed specifically for chore products such as snow throwers
- ⚙️ Innovative clutch technology allows tires to be controlled independently, reducing operator fatigue
- ⚙️ Maintenance-free design for longer life

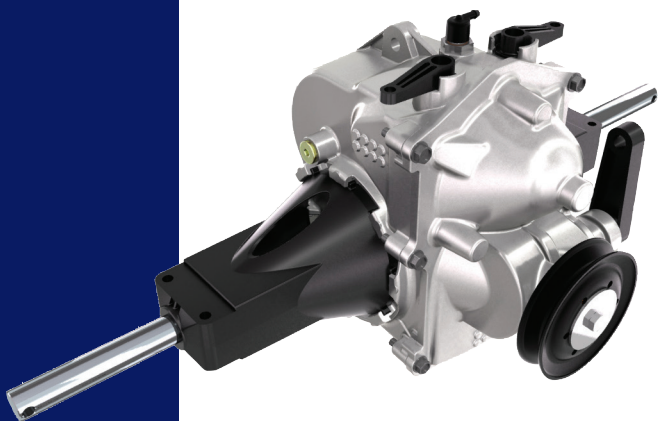

 **HYDRO-GEAR®**

DESIGNED & ASSEMBLED IN THE USA

EFFICIENT & RELIABLE

SPECIFICATIONS

Overall Transaxle Reduction	30.43:1
Pump Displacement	0.36 in ³ /rev [6 cc/rev]
Motor Displacement	0.36 in ³ /rev [6 cc/rev]
Input Speeds	
Max Hi-idle (No Load)	2600 rpm
Min (Loaded)	1800 rpm
Output Torque	
Continuous	62 lb-ft [84 Nm]
Intermittent	130 lb-ft [176 Nm]
Weight on Tires (per unit)	
Max w/ 12in Tires	290 lb [131.5 kg]
Max w/ 14in Tires	290 lb [131.5 kg]
Max w/ 16in Tires	290 lb [131.5 kg]
Axle Shaft Diameter	0.75 in [19.05 mm]
Weight of Unit	21.4 lbs [9.7 kg]
Blower Width	24-36 in [61-91.4 cm]

Specifications subject to change without notice



SST-09/2016-V1

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**

