


T2[®] & T2-HP[™]

ENGINEERED FOR POWER

- ⚙️ Rugged die-cast aluminum housings provide unmatched performance for the long haul
- ⚙️ Sturdy 3/4 inch axles
- ⚙️ Maintenance-free design for ease of use
- ⚙️ Infinite speed control for precise handling in the tightest spots

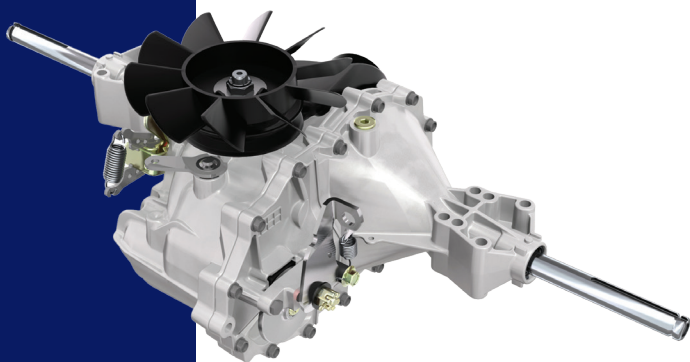

DESIGNED & ASSEMBLED IN THE USA

EFFICIENT & RELIABLE

SPECIFICATIONS

| | T2 | | T2-HP |
|-----------------------------|-----------------------|-----------------------|-----------------------|
| Overall Transaxle Reduction | 20.63:1 | 22.68:1 | 25.42:1 |
| Input Speeds | 3000 rpm | | |
| Max Hi-Idle (no load) | 1800 rpm | | |
| Min (loaded) | | | |
| Output Torque | | | |
| Continuous | 105 lb-ft [142 Nm] | 115 lb-ft [156 Nm] | 145 lb-ft [197 Nm] |
| Intermittent | 195 lb-ft [264 Nm] | 215 lb-ft [291 Nm] | 285 lb-ft [386 Nm] |
| Axle Shaft Diameter | 0.75 in [19.05 mm] | | |
| Axle Shaft End Options | Keyed or Two Flats | | |
| Parking Brake Type | External Disc | | |
| Weight of Unit | 28 lb [12.7 kg] | | |

Specifications subject to change without notice

FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM



T2/T2HP-02/2018-V