


T3 HD™

ENGINEERED FOR POWER

- ⚙️ Rugged die-cast aluminum housings provide unmatched performance for the long haul
- ⚙️ Sturdy 3/4 inch axles
- ⚙️ Maintenance-free design for ease of use
- ⚙️ Infinite speed control for precise handling in the tightest spots

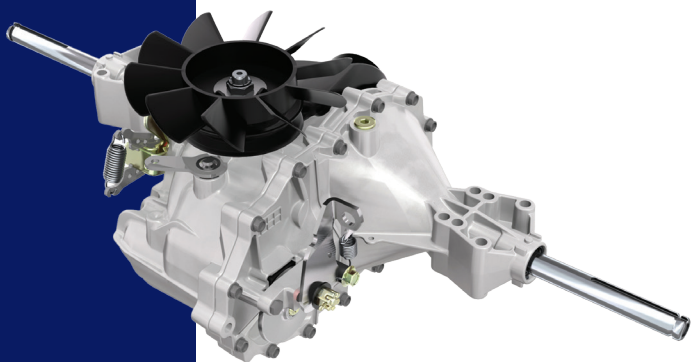

 **HYDRO-GEAR®**

DESIGNED & ASSEMBLED IN THE USA

EFFICIENT & RELIABLE

SPECIFICATIONS

T3 HD

Overall Transaxle Reduction	24.27:1	26.70:1	29.91:1
Input Speeds			
Max Hi-Idle (no load)	3000 rpm		
Min (loaded)	1800 rpm		
Output Torque			
Continuous	140 lb-ft [189 Nm]	150 lb-ft [203 Nm]	160 lb-ft [216 Nm]
Intermittent	230 lb-ft [311 Nm]	290 lb-ft [393 Nm]	300 lb-ft [406 Nm]
Axle Shaft Diameter	0.75 in [19.05 mm]		
Axle Shaft End Options	Keyed or Two Flats		
Parking Brake Type	External Disc		
Weight of Unit	28 lb [12.7 kg]		

Specifications subject to change without notice

FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM



T3HD-02/2018-V1