


# ZT-3800<sup>TM</sup> WITH OIL COOLER

## BEAT THE HEAT

- ⚙️ Oil cooler for reduced heat and drivetrain longevity
- ⚙️ Higher weight capacity for vehicles up to 1800 lb
- ⚙️ High-efficiency 12cc pump & 16cc motor
- ⚙️ All-steel gear train and improved seals

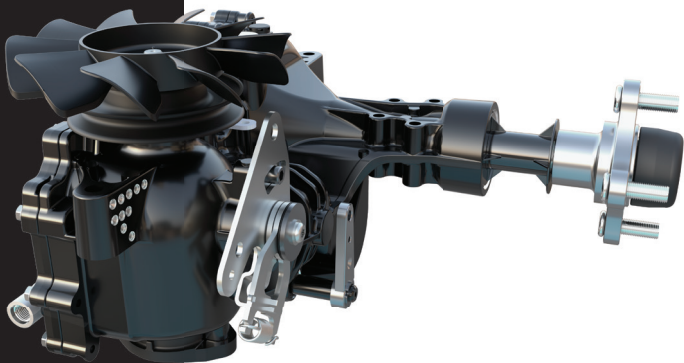

**HYDRO-GEAR<sup>®</sup>**  
**COMMERCIAL**

**DESIGNED & ASSEMBLED IN THE USA**

# ENGINEERED TO PERFORM

## SPECIFICATIONS

<b>Pump Displacement</b>	0.73 in <sup>3</sup> /rev [12 cc/rev]
<b>Motor Displacement</b>	0.97 in <sup>3</sup> /rev [16 cc/rev]
<b>Input Speeds</b> <b>Max Hi-idle (No Load)</b> <b>Min (Loaded)</b>	3600 rpm 1800 rpm
<b>Output Torque</b>	up to 500 lb-ft [up to 677 Nm]
<b>Speed</b>	up to 11 mph [up to 17 kph]
<b>Gross Vehicle Weight</b>	up to 1800 lbs [up to 816 kg]
<b>Axle Shaft Diameter</b>	1.125 in [28.56 mm]
<b>Axle Shaft Options</b>	Tapered 4 or 5 bolt Flange
<b>Weight of Unit</b>	35.8 lbs [16.2 kg]

*Specifications subject to change without notice*

**FOR MORE INFORMATION VISIT:  
WWW.HYDRO-GEAR.COM**



ZT3900-OC-09/2018-V1