


ZT-3800™

HYDRO-GEAR COMMERCIAL TRANSAXLE

- Designed for premium commercial vehicles
- Unmatched maneuverability in tight spaces
- High-efficiency 12cc pump & 16cc motor
- Durable 1-1/8" axle for heavier loads
- Upgraded housing, all-steel gear train, and larger axle bearing provides added weight capability for heavier vehicles
- Optional oil cooler port or internal expansion tank for easier installation

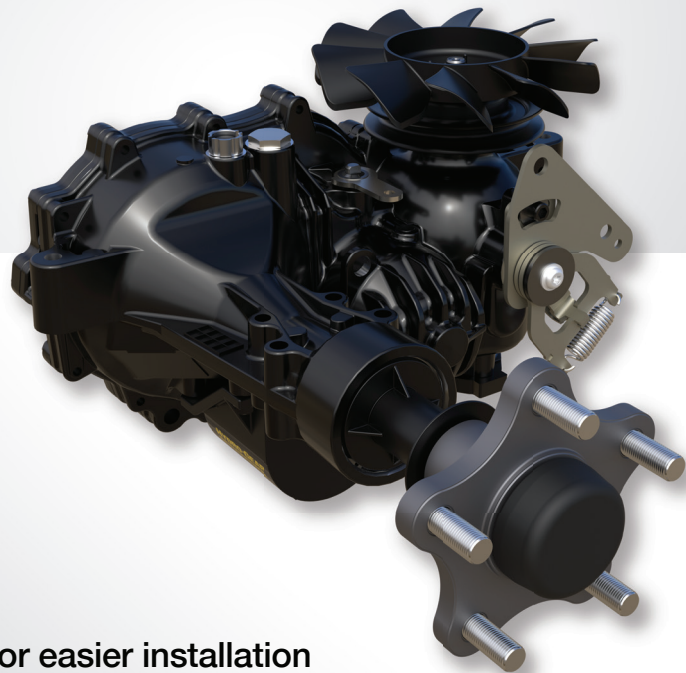

RESIDENTIAL

ZT-1800 ZT-2200 ZT-2800



COMMERCIAL

ZT-3100 ZT-3200 ZT-3400 ZT-3600 **ZT-3800** ZT-4400 ZT-5400



ZT-3800™

HYDRO-GEAR COMMERCIAL TRANSAXLE

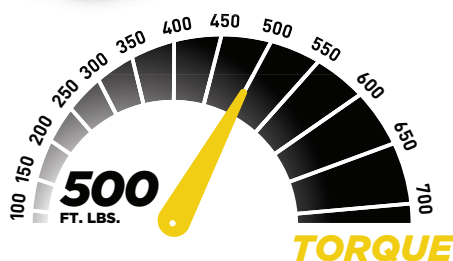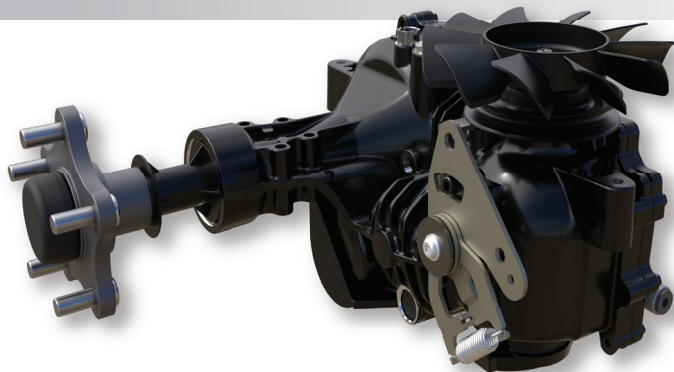

SPECIFICATIONS

PUMP DISPLACEMENT	0.73 in ³ /rev 12 cc/rev
MOTOR DISPLACEMENT	0.97 in ³ /rev 16 cc/rev
Input Speeds MAX HI-IDLE (NO LOAD) MIN (LOADED)	3600 rpm 1800 rpm
OUTPUT TORQUE	up to 500 lb-ft up to 677 Nm
SPEED	up to 11 mph up to 17 kph
GROSS VEHICLE WEIGHT	up to 1800 lbs up to 816 kg
AXLE SHAFT DIAMETER	1.125 in 28.56 mm
AXLE SHAFT OPTIONS	Tapered 4 or 5 Bolt Flange
WEIGHT OF UNIT	35.8 lbs 16.2 kg

Specifications subject to change without notice