


ZT-4400™

HEAVY-DUTY COMMERCIAL TRANSAXLE

- Revolutionary design that improves operator control while reducing vibration and noise
- Perfect for machines up to 1800 lbs
- High capacity thrust bearing for longer life
- Heavy-duty roller bearings
- Large 1-3/8" axle to support heavier machines
- Performance package - Charge Pump & Shock Valves

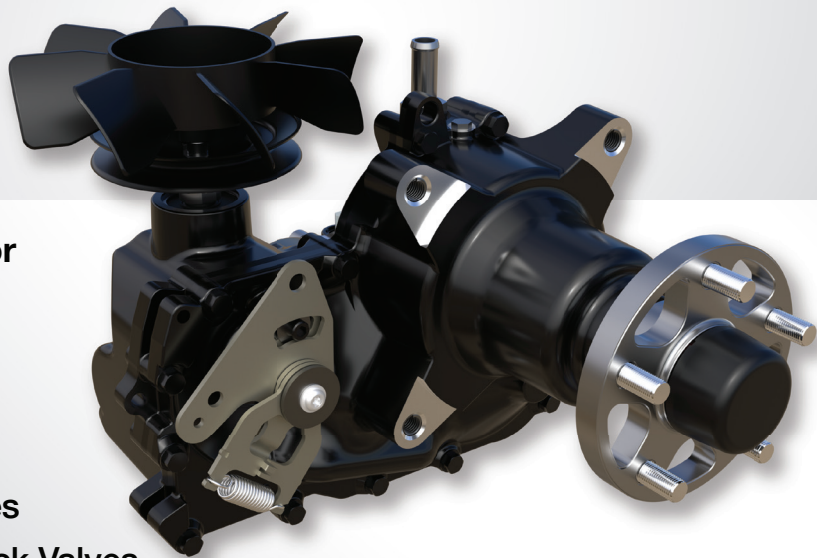

RESIDENTIAL

ZT-1800 ZT-2200 ZT-2800



COMMERCIAL

ZT-3100 ZT-3200 ZT-3400 ZT-3600 ZT-3800 **ZT-4400** ZT-5400



ZT-4400™

HEAVY-DUTY COMMERCIAL TRANSAXLE

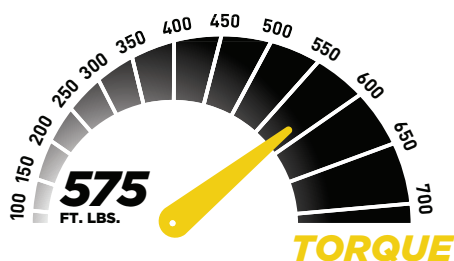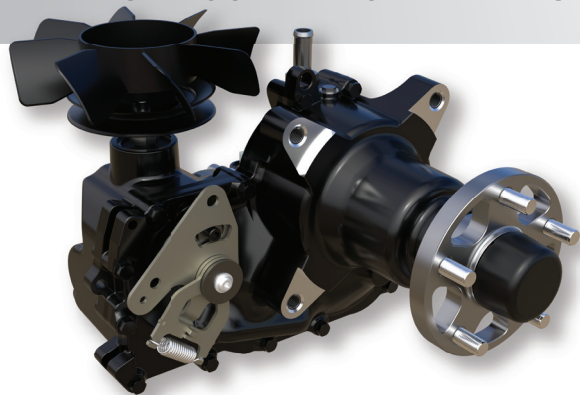

SPECIFICATIONS

PUMP DISPLACEMENT	0.73 in ³ /rev 12 cc/rev
MOTOR DISPLACEMENT	0.97 in ³ /rev 16 cc/rev
Input Speeds MAX HI-IDLE (NO LOAD) MIN (LOADED)	3600 rpm 1800 rpm
OUTPUT TORQUE	up to 575 lb-ft up to 780 Nm
SPEED	up to 12 mph up to 19 kph
GROSS VEHICLE WEIGHT	up to 1800 lbs up to 816 kg
AXLE SHAFT DIAMETER	1.375 in 35 mm
AXLE SHAFT OPTIONS	Tapered 4 or 5 Bolt Flange
WEIGHT OF UNIT	55 lbs 25 kg

Specifications subject to change without notice